

HÅG's mission is to give movement and variation to the workplace. HÅG products stimulate intuitive and natural movement of the body and variation of sitting postures leading to improved health and productivity.

HÅG SoFi Communication

- HÅG in Balance® technology ensures more subconscious movement for more energy and better flow throughout your meetings.
- Soft, embracing curves together with a unique, padded lumbar support provides excellent comfort and support.
- Designed to be customized with a wide range of materials and colours.
- Seat height and seat depth adjustment, fully upholstered seat and backrest, aluminium four star base with foot support.



Design: Frost Produkt AS,
Powerdesign AS and Flokk Design Team
Patent- and design protected



QUALITY

10-year guarantee:

Flokk provides a ten-year guarantee against production defects on all office chairs that are in normal use for up to 9 hours per day.

Certifications:

- Tested in accordance to EN 1335 Class A, ANSI/BIFMA X5.1 and GS mark.
- Flokk is certified by DNV-GL according to ISO 9001.

Maintenance:

- Vacuum clean the chair with a furniture brush or wipe it with a clean, white cloth or sponge slightly dampened with clean lukewarm water. Do not remove any plastic parts or attempt to open the seating mechanism. Contact your Flokk dealer if the chair requires servicing or maintenance.

Fire safety information:

- CMHR foam (fire resistant foam) is available on request, for the fully upholstered model, but must be specified at time of order and adds approximately two to five weeks to delivery lead times.

ENVIRONMENT

- Easy to disassembly without using any special tools.
- Contains 45% of recycled material (post-consumer and post-industrial waste).
- Carbon footprint at 92 kg CO₂ equivalents.
- Contains no hazardous chemicals.

Certifications:

- Flokk has a certified Environmental Management system in accordance with ISO 14001.
- Environmental product declaration (EPD) – life cycle analyse of the chair based on 14025-EPD.
- GREENGUARD certificate – ensures that the chair meets strict chemical emissions limits.



Materials specifications for HÅG SoFi 7202/7302 (fully upholstered):

- Aluminium 38%, Plastics 28%, Steel 22%, PUR 6%, Zinc: 5%, Textiles: 1%, PVC 0%.
- Total weight of product 23,1 kg (with armrests).
- Share of recyclable material: 95%.

Materials specifications for HÅG SoFi 7502 (mesh):

- Mesh is 100% polyseter and has certificate for Oeko-Tex® Standard 100.

MODELS AND MEASUREMENTS



Physical measurements HÅG SoFi Communication	7202	7302**	7502
Seat height, measured with 64 kg load 165mm lift [1]*	400-550	400-550	400-550
Height of backpads (mm) [2]	620	720	720
Height of foremost supportpoint on backpads (mm) [3]	165-256	165-256	165-256
Height of foremost supportpoint on headrests [4]	N/A	N/A	N/A
Seat depth (mm) [5]	380-460	380-460	380-460
Height armrests (mm) [6]	186-297	186-297	186-297
Seat width (mm) [7]	450	450	450
Chair width (mm) [8]	600-715	600-715	600-715
Footbase diameter (mm) [9]	785	785	785
Weight (without armrests)	16.2 kg	16.7 kg	15.7 kg

Tilt range is 11° forwards and 13° backwards. The starting (neutral) position is taken as 2° backwards.

Please note that these measurements are not absolute. They may vary slightly from chair to chair.


* Standard lift according to EN 1335 Class A.

**Armrests are optional extras

***Please note that weight is without armrests.

A: Mid-point of chair, loaded with 64 kg.

S: Foremost point of back, reference point for measurement of back support adjustment.

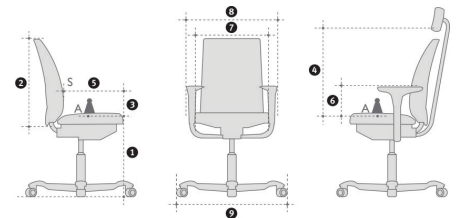

CONFIGURATION OPTIONS

- HÅG SoFi Communication is available in two heights for fully upholstered backs, and one height for mesh back. Mesh back is available in two colours (black and light grey).
- All models can be upholstered in textiles from the HÅG Standard Collection or the HÅG Extended Collection.
- Armrests in aluminium or plastic are optional extras and are supplied with either soft tops or leather tops.
- Four star base (Ø785 mm) in black, silver or white painted aluminium as standard. Optional polished aluminium and/or five star base (Ø730 mm) with castors.